


# HCG-4D Series / Data sheet



12V 318Ah

Bluetooth



## Model Included:

- HCG4D-12318** 12V 318Ah LiFePO4 Battery
- HCG4DS-12318BT** 12V 318Ah LiFePO4 Battery with Bluetooth

Haicen Advanced Lithium Batteries		Model	
		HCG4D-12318	HCG4DS-12318BT
Electrical Specifications	Nominal Voltage	12.8V	12.8V
	Nominal Capacity	318Ah	318Ah
	Parallel Connection	Max. 4units	Max. 4units
	Serial Connection	Max. 4units	Max. 4units
	BMS	4S200A	4S200A
	Bluetooth	No	Android/IOS
	Circuit Protection	Over charge, Over discharge, Over current, Over temp, Short, Balance	
	Cycle Life	3000times Cycles @100%DOD and 6000times @80% DOD	
	Self Discharge	Less than 3% per month	
	Charge Efficiency	100% @0.2C	
	Discharge Efficiency	98-100% @1C	
Charge Specifications	Charge Voltage	14.4±0.2V	14.4±0.2V
	Standard Current	63A	63A
	Fast Current	159A	159A
Discharge Specifications	Standard Current	63A	63A
	Max. Con. Current	200A	200A
	Peak Current	800A(300ms)	800A(300ms)
	Cut-off Voltage	10V	10V
Mechanical Specifications	Dimensions (mm)	521x238x218mm (G4D)	
	Approx Weight(KG)	28	28
	Terminal Type	M8	
	Case Color/material	Black Plastic case (ABS)	
	IP Rating	IP65	
	Cell Type	3.2V106Ah prismatic cell	
	Cell holder	Yes	
Temperature Specifications	Charge Temp	0°C to 55°C	(32°F to 131°F)
	Discharge Temp	-20°C to 60°C	(-4°F to 140°F)
	Storage Temp	-5°C to 45°C	(23°F to 113°F)

12V 318Ah

Bluetooth

## Key Points for Quality control:

- Cell match:**  
 Much stricter than most suppliers, the strict cell matching standards ensure the consistency of the cells and thus the high consistency of the battery pack.
- Automatic cells welding:**  
 Cells are assembled by Automatic welding equipments to ensure the quality reliability and consistency.
- 100% Cycle test:**  
 All battery packs are 100% cycle tested (Fully Discharged→Fully Charged→Fully Discharged→60% Charged) before package and all test reports are stored.
- Unique tracking number:**  
 All battery packs are lasered an unique number on the case side for quality tracking.

## Certifications:


- UL1973 (Cell)
- UL9540 (Cell)
- IEC62133 (Cell)
- IEC62919 (Cell)
- CE (Pack)
- UN38.3 (Cell / Pack)
- ROHS (Cell)




## Dimensions:



## Internal Structure:

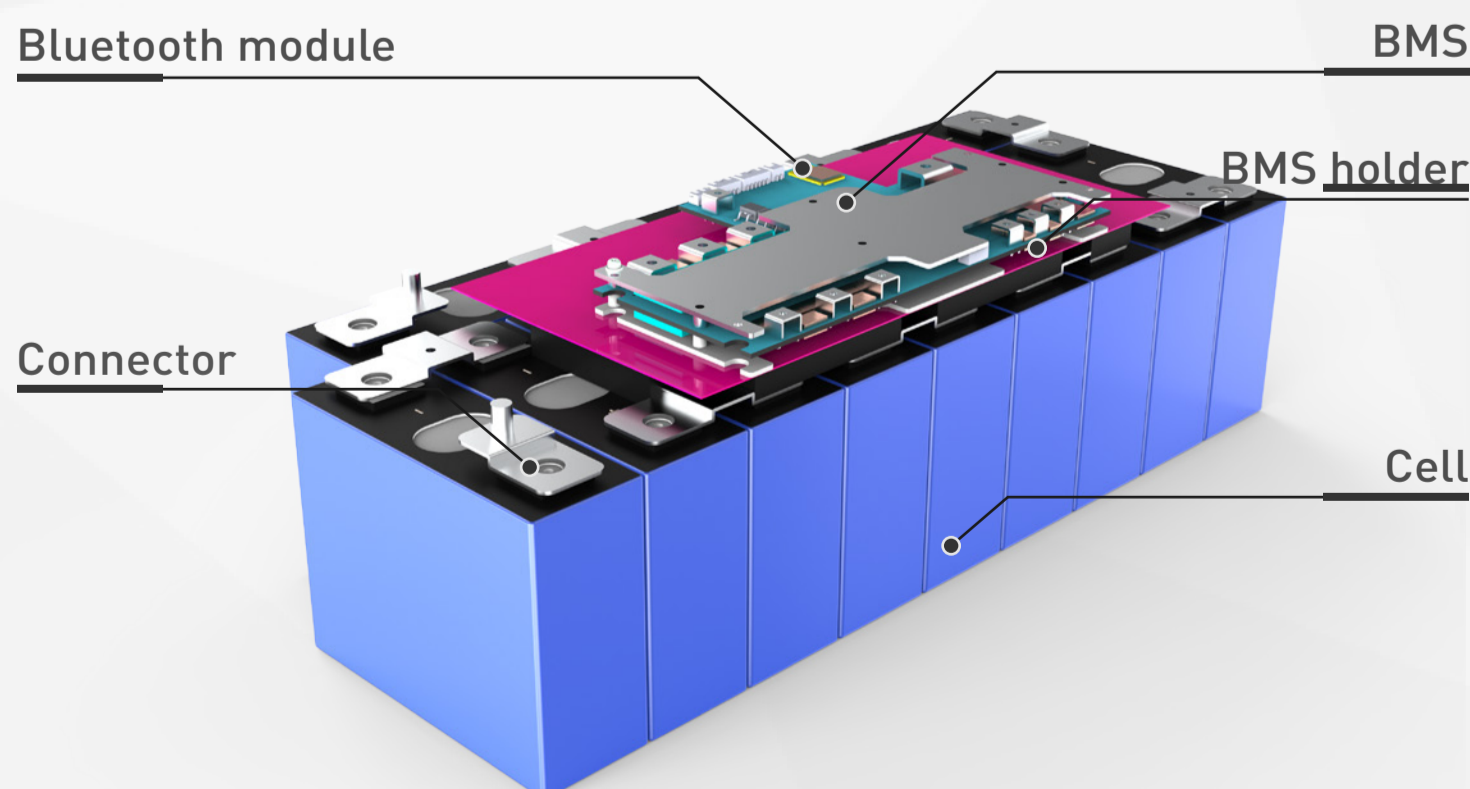

HCG4DS-12138BT

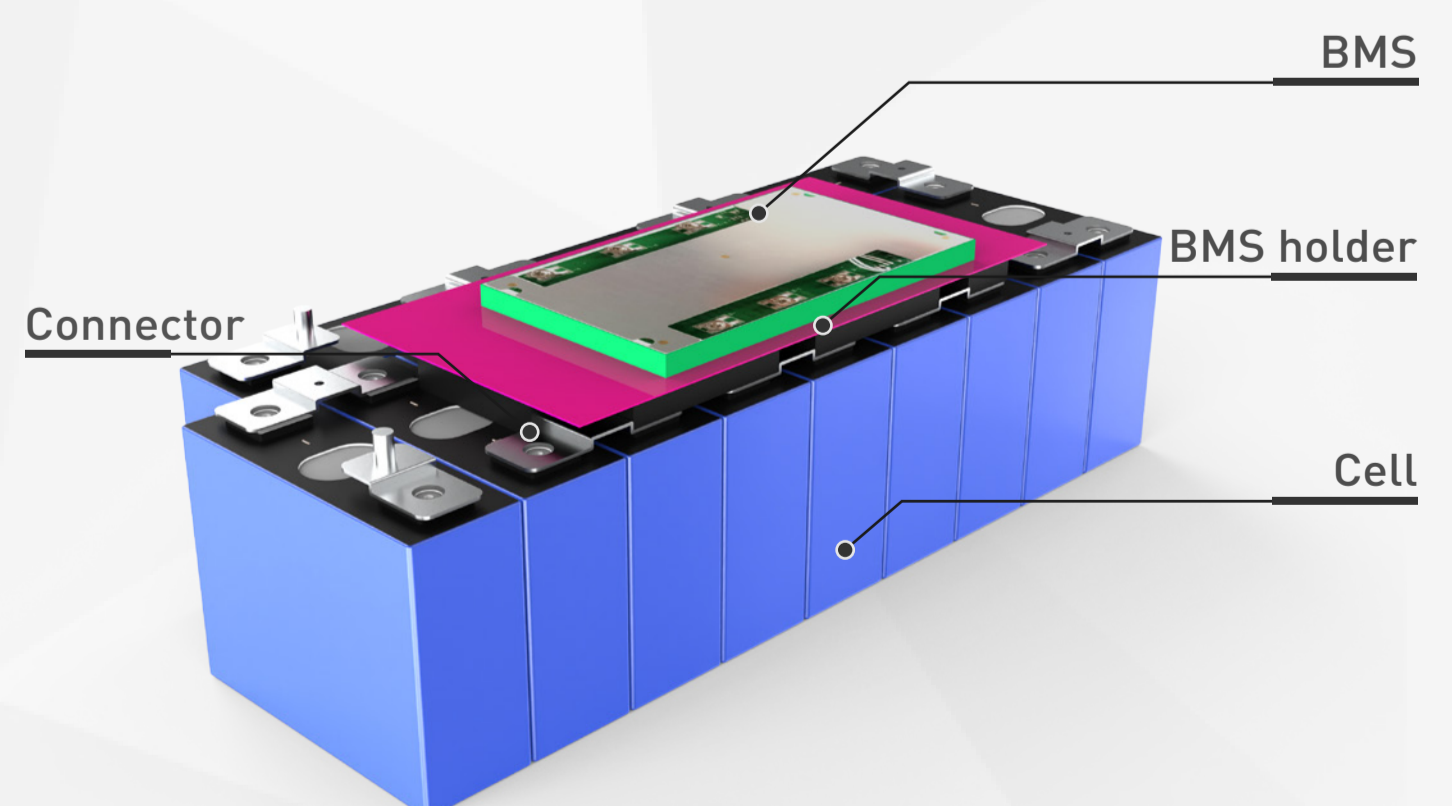


HCG4D-12138

12V 318Ah

Bluetooth

## SOC Display (optional)

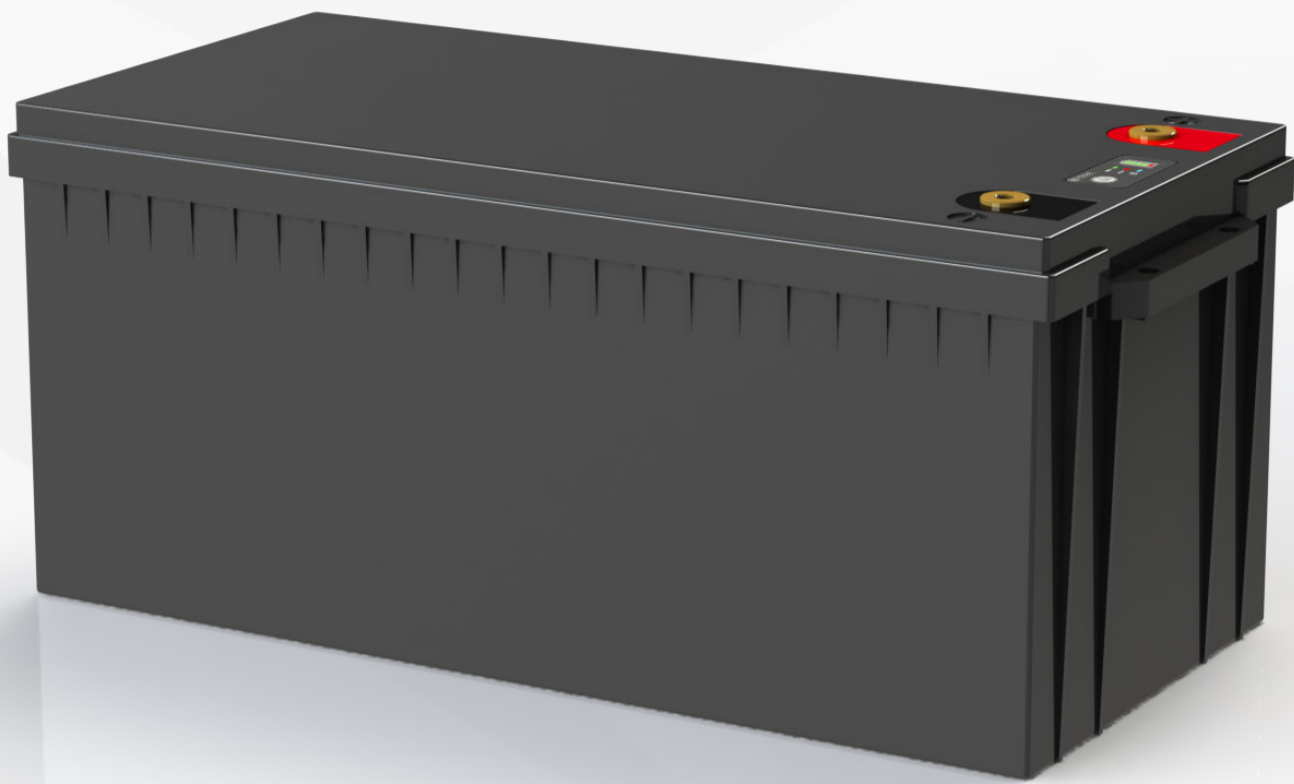

### ALM

Alarming  
The red LED will flash when the battery sends an alarm.

Customized logo is acceptable.

### RUN

Working status of the battery  
The green LED will be on when charging or discharging.

### SOC (State of Charge)

100% SOC (Full Charge)  
80% SOC  
60% SOC  
40% SOC  
20% SOC


### Switch

1. With the standby state, touch the "Switch" key, then the SOC LED will be on to show the current SOC and the RUN LED will be on. After 5s later, all LEDs in panel will turn off.

2. Press and hold the switch for 3s, then the BMS will immediately go to Sleep mode. With the Sleep state, press on the "Switch" key for 3s, then the BMS will wake up.

### Bluetooth

Bluetooth connection status  
The blue LED will be on when the battery is connected to Bluetooth.

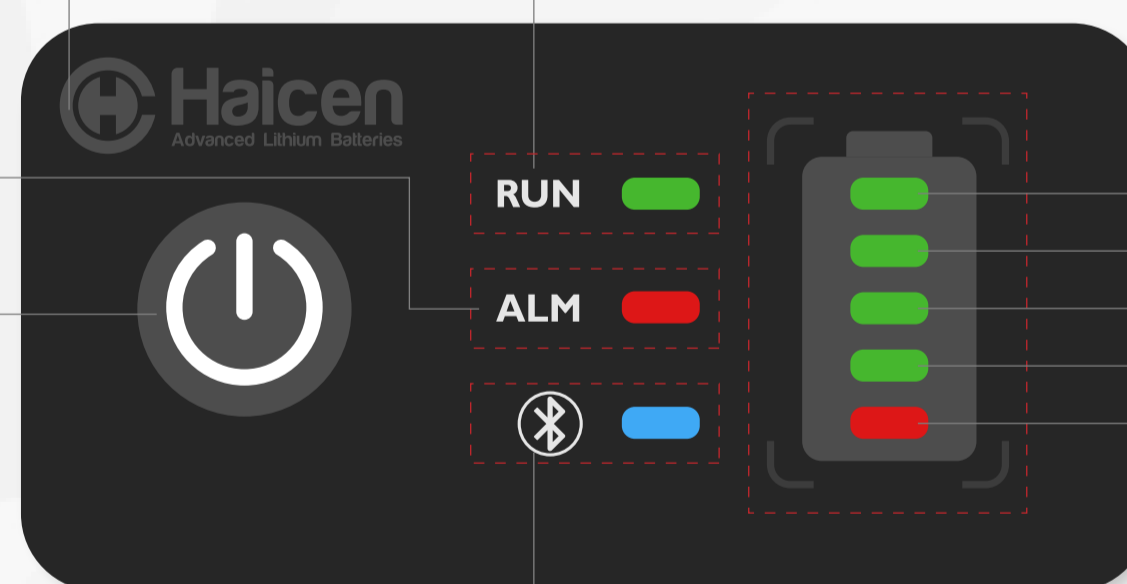


12V 318Ah


Bluetooth

## Characteristics Curve:


Charging Characteristics (0.5C @25°C)

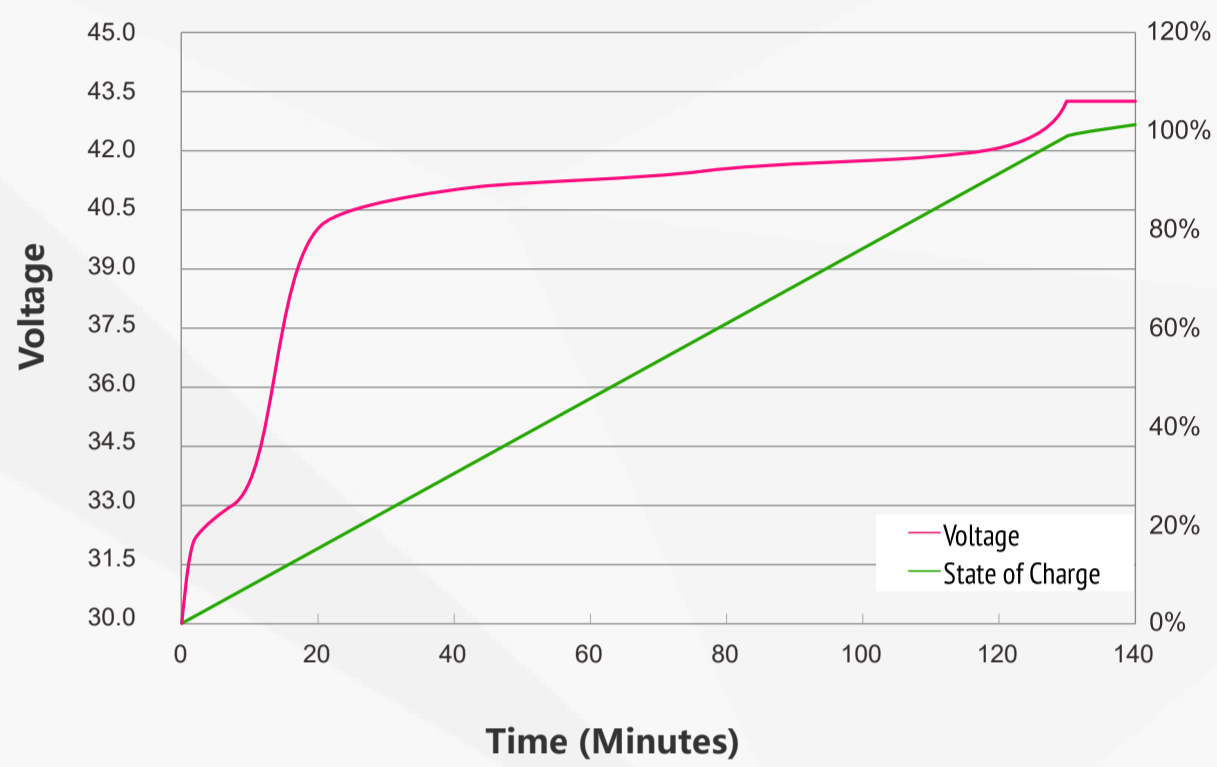


Discharging Characteristics (0.2C, 0.5C, 1C @25°C)

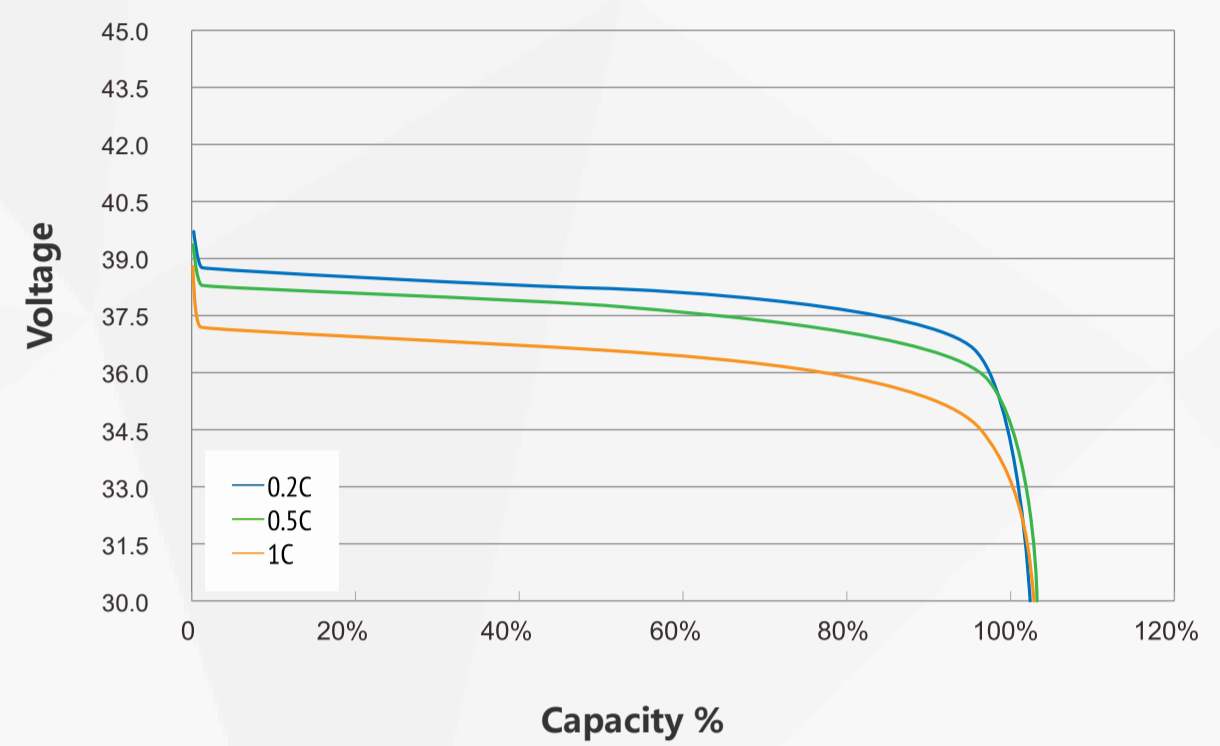


Different Temperature Capacity Curve

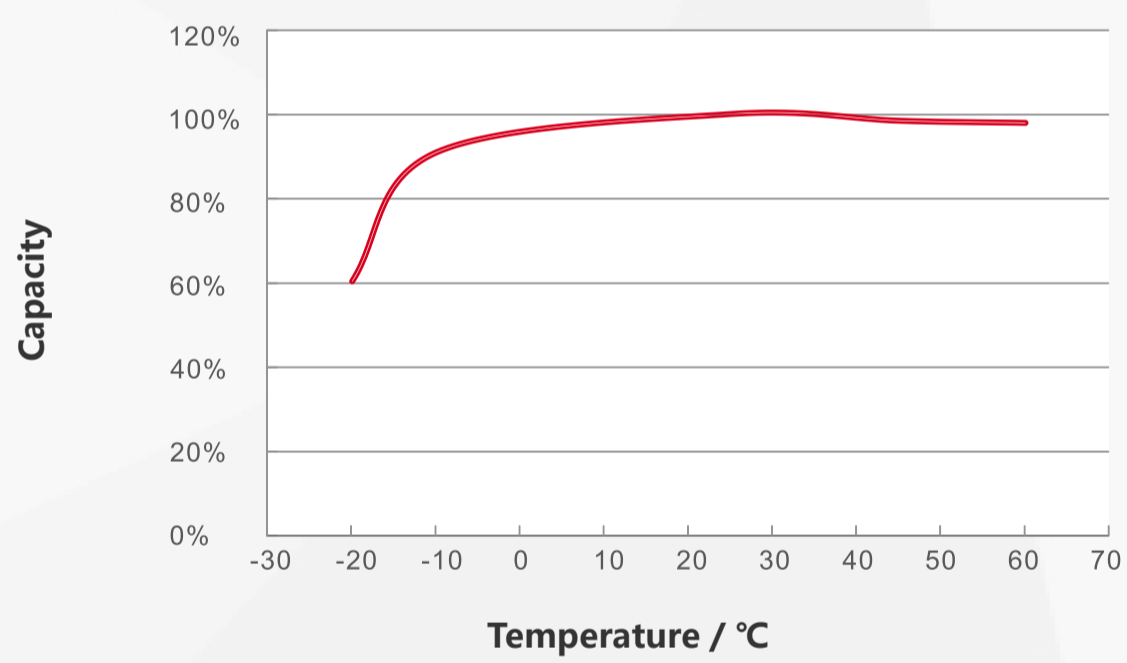


Typical Charge Time Curve

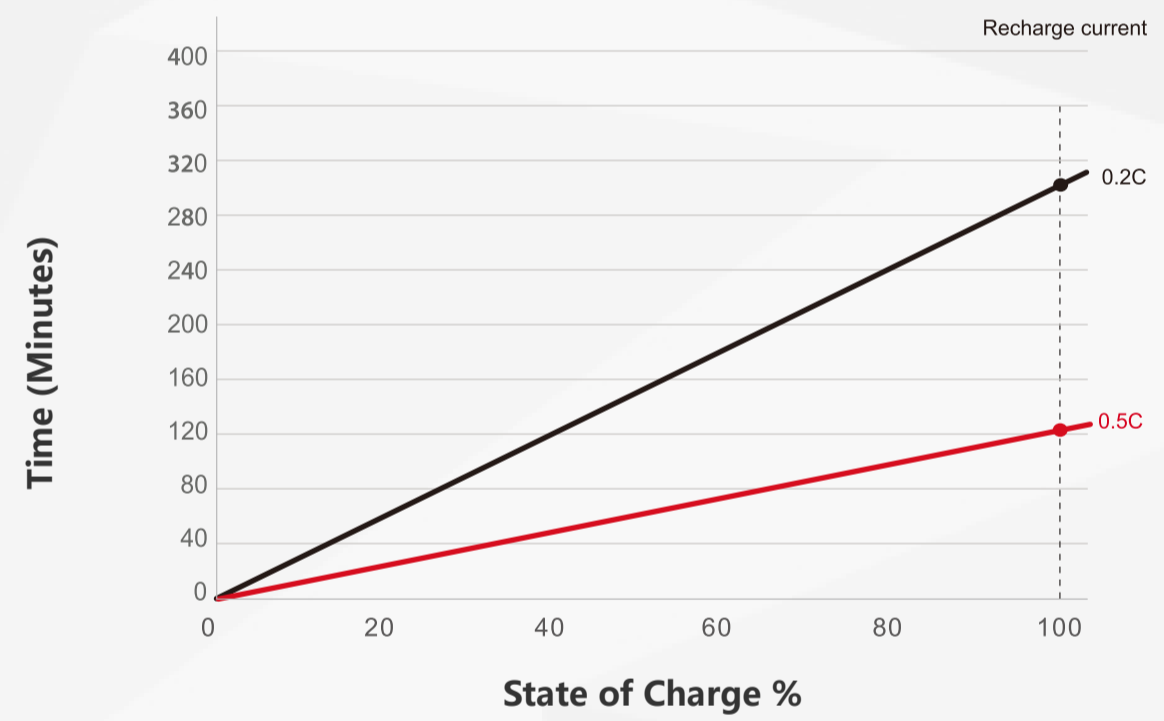

Different Temperature Self Discharge Curve

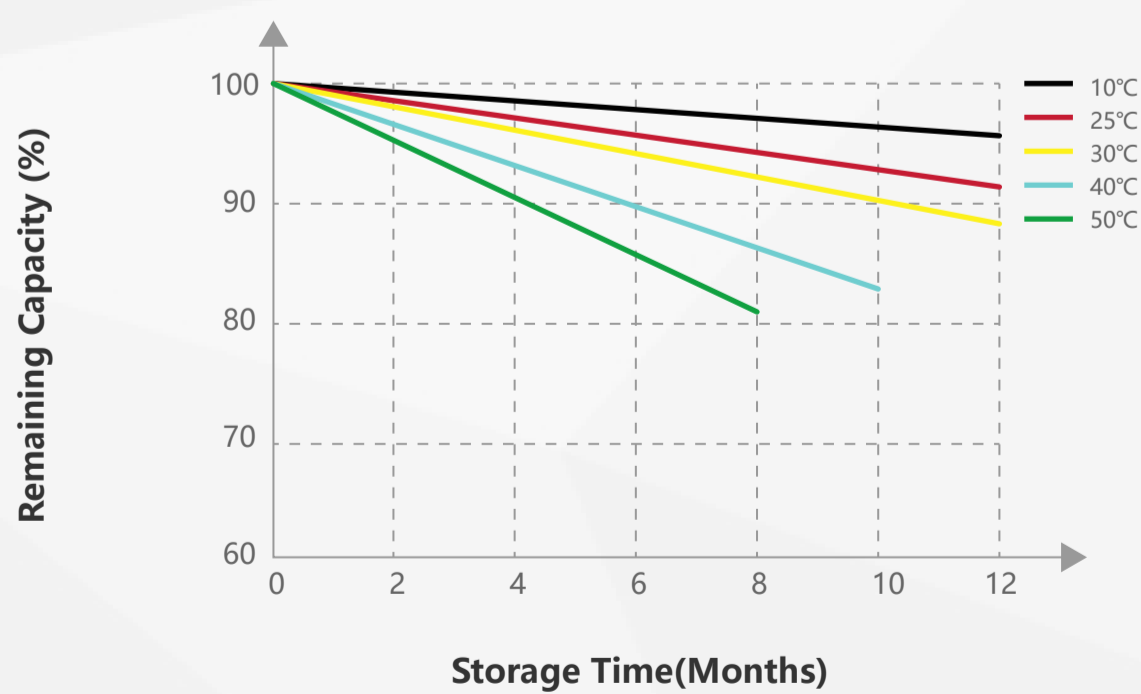

Different DOD Discharge Cycle Life Curve

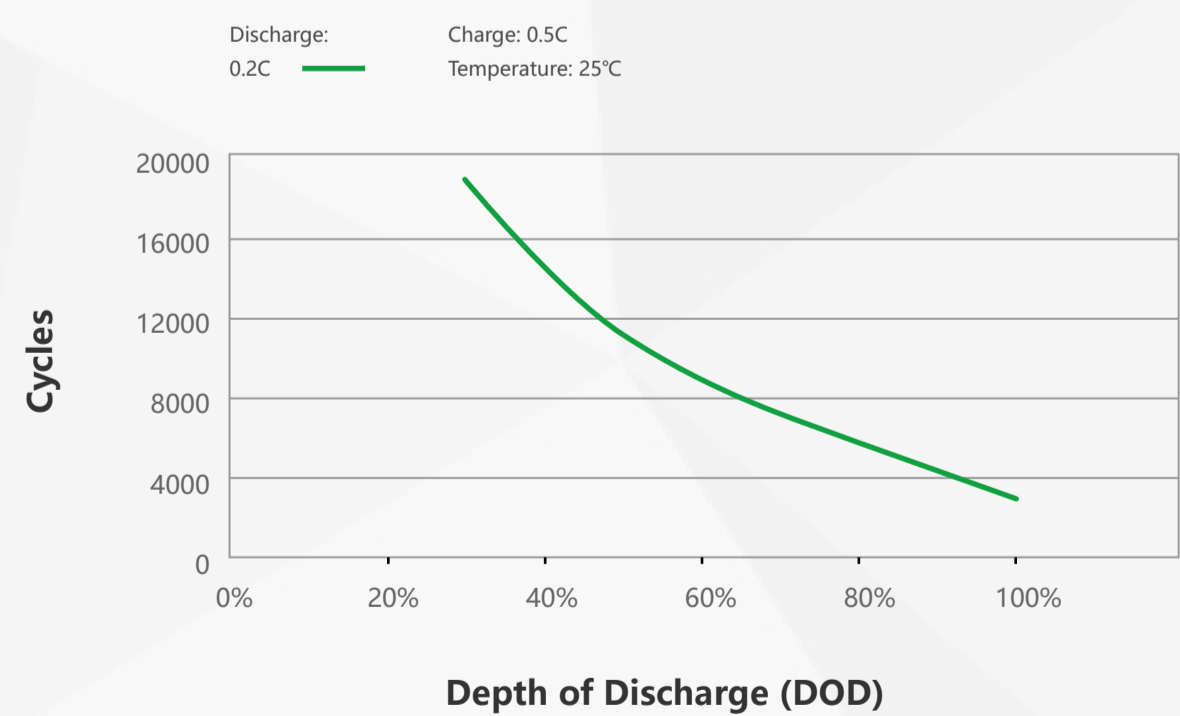

12V 318Ah

Bluetooth

## Key Benefits:

- Higher qualified cylindrical cell:**  
 UL1973, UL9540, IEC62133, IEC62619 listed with Cycle life more than 3000times and excellent consistency.
- Bluetooth:**  
 can monitor the battery status(charge, discharge, current, temperature, cycle life and so on) and change the data for different applications.
- Higher energy density with less weight:**  
 The 3.2V106Ah prismatic cell which be used in these two model is with energy density 169wh/kg, about 15% higher than others, which bring less weight.

## Market Applications:



RV



Marine



Golf cart



Cleaning



Light EV



Energy storage



Robotics



Lighting

## Package:

20' Container=10Pallets=360Cartons=360Units;  
 40' Container=20Pallets=720Cartons=720Units;



Internal Package  
Forming pearl foam

1Carton=1Unit



Weight: 35Kg/carton  
Size(LxWxH): 600x320x310mm

1Pallet=36Cartons



Weight: 1275Kg/pallet  
Size(LxWxH)=1.2x1x2m ≈ 2.4CBM

## Customized items:

- Bluetooth App design:** Help you to design and upload customized App, or supply you our Source code for your design.
- Case color:** Customized case color is acceptable based on quantity more than 300pcs per batch.
- Label design:** We can help you to design customized label on the battery.
- Carton design:** Customized carton is acceptable based on quantity more than 200pcs per batch.
- Certificates:** 50% discount on certificates cost for first bulk order and 100% reback for future orders.
- NDA agreement:** NDA agreement is allowed and necessary to protect your benefits.