

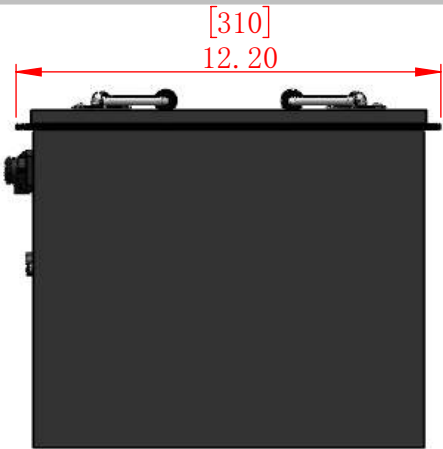


B

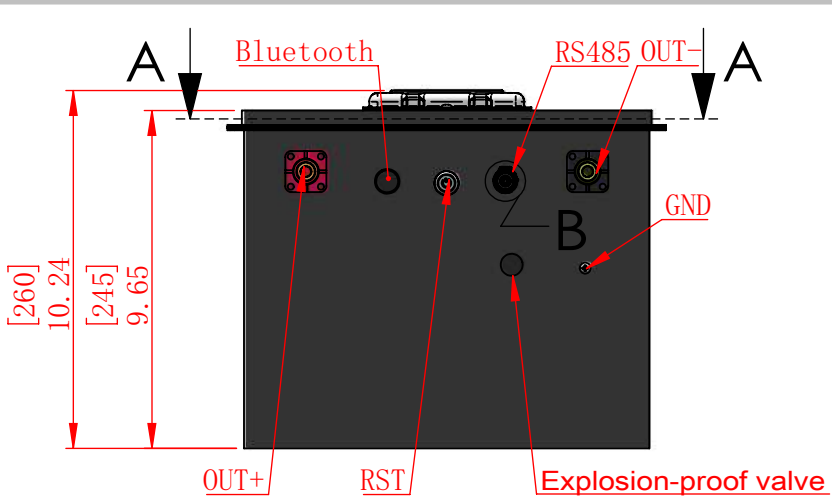

Nominal voltage: 38.4V
Typical capacity: 105Ah
Cell: LF-105Ah-3.2V-12S1P
BMS:12S100A
Max continuous discharge current: 100A
Discharge cut-off voltage About 30V
Charge input voltage :43.2V
Charge current : ≤52.5A
Size (L*W*H) : 320*310*260±2mm
Total Weight Approx 32±2kg
Waterproofing class : IP65

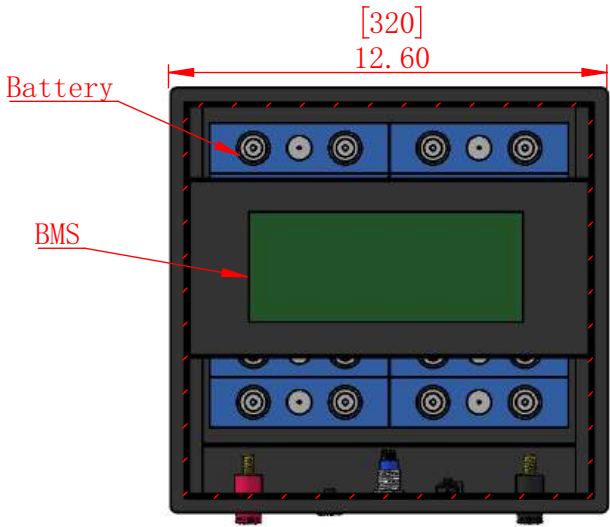

Local view B 1 : 1.5
CNLINKO-LP-5P
PIN1:RS485A PIN2:RS485B



B

A

A

Section view A-A
1 : 5.5

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Haicen Power		
		DIMENSIONS ARE IN INCHES		DRAWN	Xsy	2023-06-21	TITLE:	
		TOLERANCES:		CHECKED				
		FRACTIONAL ±		ENG APPR.				
		ANGULAR: MACH ± BEND ±		MFG APPR.				
		TWO PLACE DECIMAL ±		Q. A.				
		THREE PLACE DECIMAL ±		COMMENTS:			SIZE	DWG. NO.
		INTERPRET GEOMETRIC					A	装配体整体配合
		TOLERANCING PER:						REV
		MATERIAL					SCALE: 1:5	
		FINISH					SHEET 1 OF 1	
NEXT ASSY		USED ON						
APPLICATION		DO NOT SCALE DRAWING						