




Nominal voltage: 51.2V
Typical capacity: 64Ah
Cell: 26700-4600mAh-3.2V-16S14P
BMS:16S70A
Max continuous discharge current: 70A
Discharge cut-off voltage About 40V
Charge input voltage :57.6V
Charge current : $\leq 32A$
Size (L*W*H) : 440*285*230 ± 2 mm
Total Weight Approx 32 ± 2 kg
Waterproofing class: IP65

Section view A-A
1 : 6

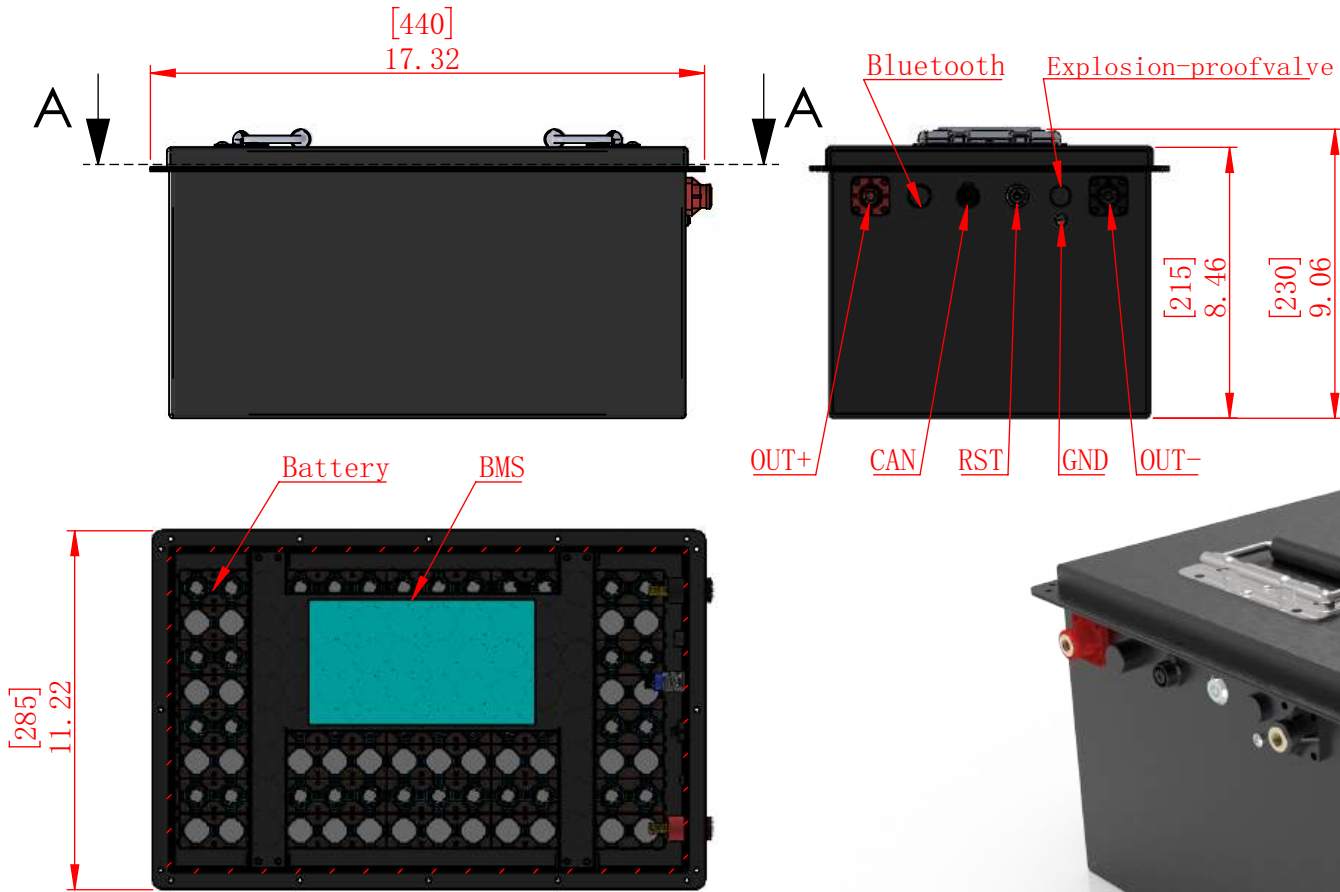

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Haicen Power		
		DIMENSIONS ARE IN INCHES	DRAWN	Xsy	2023-06-21	TITLE:		
		TOLERANCES:	CHECKED					
		FRACTIONAL $\pm$	ENG APPR.					
		ANGULAR: MACH $\pm$ BEND $\pm$	MFG APPR.					
		TWO PLACE DECIMAL $\pm$	Q. A.					
		THREE PLACE DECIMAL $\pm$	COMMENTS:			SIZE	DWG. NO.	REV
		INTERPRET GEOMETRIC				A	48V64AH	
		TOLERANCING PER:				SCALE: 1:10		
		MATERIAL				SHEET 1 OF 1		
		FINISH						
	NEXT ASSY	USED ON						
	APPLICATION		DO NOT SCALE DRAWING					