




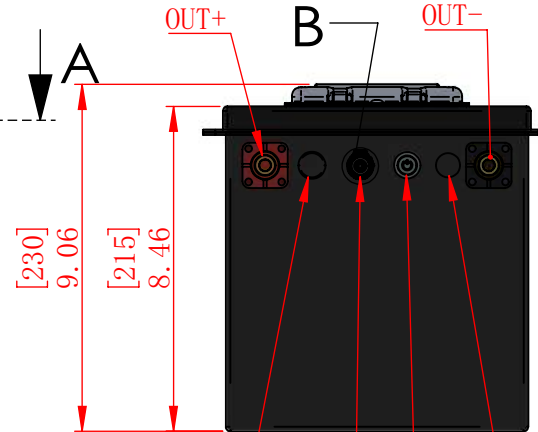

Nominal voltage: 38.4V
Typical capacity: 64Ah
Cell: 26700-4600mAh-3.2V-12S14P
BMS:12S70A
Max continuous discharge current: 70A
Discharge cut-off voltage About 30V
Charge input voltage :43.2V
Charge current : ≤32A
Size (L*W*H) : 440*230*230±2mm
Total Weight Approx 25±2kg
Waterproofing class : IP65

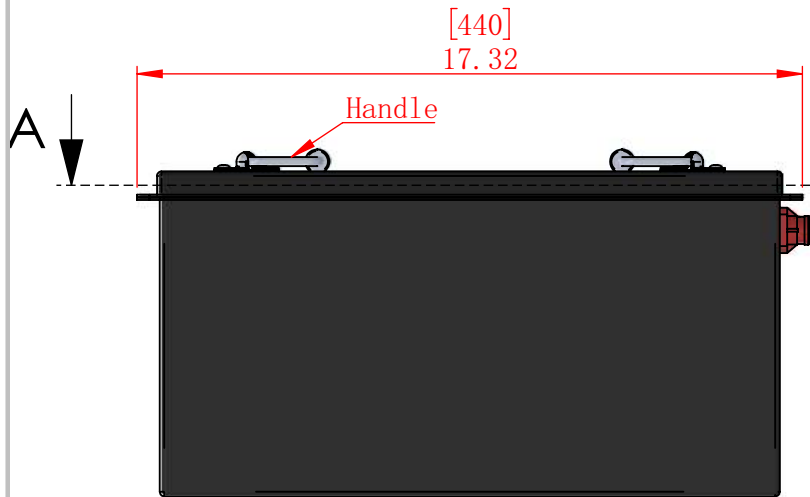

Local view B
1 : 1.5
CNLINKO-LP-5P
PIN1:RS485A
PIN2:RS485B

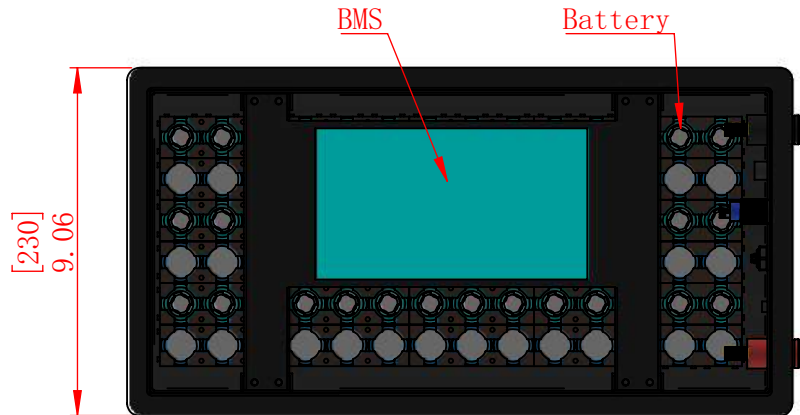

Section view A-A
1 : 5

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Haicen Power			
		DIMENSIONS ARE IN INCHES	DRAWN	Xsy	2023-06-20	TITLE:			
		TOLERANCES:	CHECKED						
		FRACTIONAL: ±	ENG APPR.						
		ANGULAR: MACH ± BEND ±	MFG APPR.						
		TWO PLACE DECIMAL ±							
		THREE PLACE DECIMAL ±	Q. A.			SIZE DWG. NO. REV			
		INTERPRET GEOMETRIC	COMMENTS:						
		TOLERANCING PER:							
		MATERIAL							
		FINISH							
NEXT ASSY	USED ON								
APPLICATION		DO NOT SCALE DRAWING							